

RackGuard



Made from a flexible, impact-absorbent polymer blend, the RackGuard protects vulnerable rack legs from front, side and scrape impacts from workplace equipment that can degrade safety.

QUALITY & CONFIDENCE

Tested and independently verified by TÜV, all **A-SAFE** products come with the reassurance of being the strongest, most innovative products from the global industry leaders.

GRIPPED & SECURE

Frictional grip points and a centralising rubber lug ensure the product stays central and secure to any rack leg, while a compression hinge ensures the leg is in a state of constant compression.

VISIBLE & ULTRA-LOW MAINTENANCE

The high visibility yellow makes accident prevention a priority and the non-scratch, non-repaint properties create large maintenance savings.

EASY INSTALL FOR ALL RACKING

A Rackguard Tool Set assists with ultra-fast installation for every rack leg size.



“Busy warehouse operations like ASDA have a high volume of traffic as well as numerous pedestrians on site at any one time. Therefore, sub-standard safety systems which can harm our workers and cause disruption to this schedule are not acceptable. The products are not only easy to install and adaptable to our ever-changing needs, but require little upkeep or repair and therefore we are finding that **A-SAFE** products are saving us thousands of pounds a year.

ASDA
Facilities Manager

PROTECTING...













PEOPLE, PROPERTY, PROFITS AND PERFORMANCE



RackGuard




SPECIFICATIONS

Angle of impact	45°	90°	180°
Tested impact energy (Joules)	 800	1000	800
Equivalent vehicle weight (kg)	 2000	2000	2000
Equivalent vehicle speed (km/h)	 3.2	3.6	3.2
Material Properties			
Temperature MEMAPLEX	 -15°C to +50°C		
Temperature MEMAPLEX	 -40°C to +30°C		
Chemical Resistance	 Excellent - ISO / TR 10358		
Fire Rating	 HB		
Food Contact	 Yes		
Toxicity	 None		
Conductivity	 No		
Environment			
CO ₂ / RackGuard	 2.142		
Recyclability	 100%		

Terms and conditions apply

DIMENSIONS

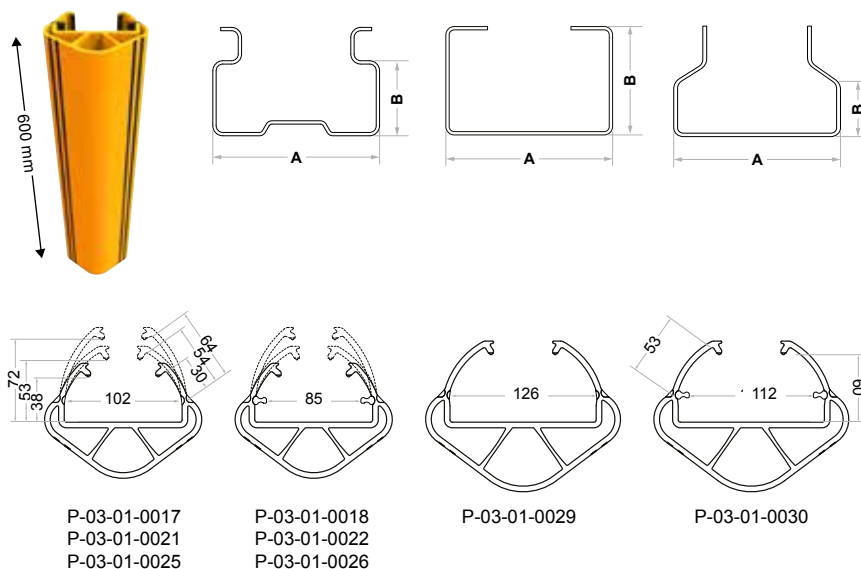

* iFlex RackGuards are also available in 400mm, 1000mm and bespoke sizes, as well as with internal rubber lugs. All iFlex RackGuards are available in the Memaplex FR option.

COMPONENTS



Part Code	Description	A - Rack width (max)	B - Rack depth (max)
P-03-01-0017	RackGuard (S) SL - 600mm	102	45
P-03-01-0021	RackGuard (S) ML - 600mm	102	68
P-03-01-0025	RackGuard (S) LL - 600mm	102	80
P-03-01-0018	RackGuard (S) SLR - 600mm	85	45
P-03-01-0022	RackGuard (S) MLR - 600mm	85	68
P-03-01-0026	RackGuard (S) LLR - 600mm	85	80
P-03-01-0029	RackGuard (L) SL - 600mm	126	75
P-03-01-0030	RackGuard (L) SLR - 600mm	112	75
S-01-02-0011	RackGuard Tool Set		